

Notes _____



Driver _____

Date ____ / ____ / ____ Sheet # ____ of ____

	FRONT			REAR		
Piston	1 2	3 4	5	1 2	3 4	5
Oil	wt.			wt.		
Oil Brand						
Springs						
Spacers						
Length	L			L	R	


Camber		
Caster	8 10	
Kick-Up	0 2	
Toe	0 1 2	0 1 2
Ride Height	mm	mm
Sway Bars	R G P	R G P
Roll Center Spacer	mm	mm

FRONT
(rear view)




Shock Tower Positions
X - Standard position for Pro 2
Y - 2mm LESS ride height


Draw lines or mark circles for link locations
Mark in center of circles shows stock positions



REAR
(rear view)

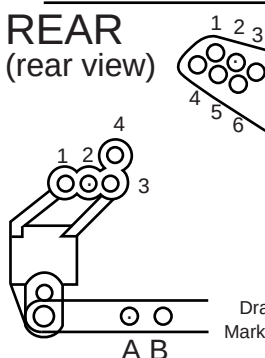

Draw lines or mark circles for link locations
Mark in center of circles shows stock positions

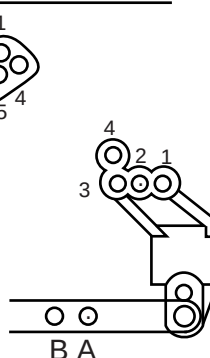

	FRONT			REAR		
Brand	22mm	24mm	26mm	22mm	24mm	26mm
Type						
Compound						
Traction Compound (shade treated area):	L	R		L	R	
Belted	☐ Yes	☐ No		☐ Yes	☐ No	
Tire Insert:	☐ Stock	☐ Other:		☐ Stock	☐ Other:	
	☐ Soft	☐ Medium	☐ Firm	☐ Low Bounce		
Total Width:	mm (measure from outside edge of wheels, with tires pointing forward, where tires touch ground)			mm (measure from outside edge of wheels where tires touch ground)		

Motor	Turns/Winds	Spur and Pinion	Brushes	Motor Springs
				+ -

Misc	ESC Settings	Body	Ackerman Link	Chassis Posts	Battery Position	One-Way
			☐ Outer (Standard) ☐ Inner	☐ Front ☐ Rear	☐ Saddle ☐ Stick	☐ Front Diff ☐ 15T Pulley ☐ 14T Pulley

Run	Run/Qualifier/Main #	Laps	Time	Run Comments

Notes